

KBL Plastic-Encapsulate Bridge Rectifier

Features


- I_O 4A
- VRRM 50V-1000V
- High surge current capability
- Glass passivated chip

Applications

- General purpose 1 phase Bridge rectifier applications

Marking

- KBL4XX
XX : From 005 To 10

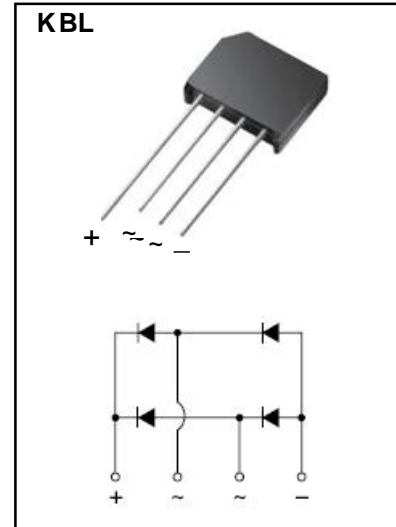

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	KBL4						
				005	01	02	04	06	08	10
Repetitive Peak Reverse Voltage	V _{RRM}	V		50	100	200	400	600	800	1000
Average Rectified Output Current	I _O	A	60Hz sine wave, R-load T _c =40°C	4						
Surge(Non-repetitive)Forward Current	I _{FSM}	A	60Hz sine wave, 1 cycle, T _j =25°C	125						
Current Squared Time	I ² t	A ² S	1ms≤t<8.3ms T _j =25°C, Rating of per diode	93						
Storage Temperature	T _{stg}	°C		-55 ~+150						
Junction Temperature	T _j	°C		-55 ~+150						

Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V _{FM}	V	I _{FM} =4.0A, Pulse measurement, Rating of per diode	1.1
Peak Reverse Current	I _R	μA	V _{RM} =V _{RRM} , Pulse measurement, Rating of per diode	10
Thermal Resistance	R _{θ J-A}	°C/W	Between junction and ambient	13 ⁽¹⁾
	R _{θ J-C}		Between junction and case	2.4 ⁽²⁾

Typical Characteristics

FIG.1-MAXIMUM FORWARD SURGE CURRENT

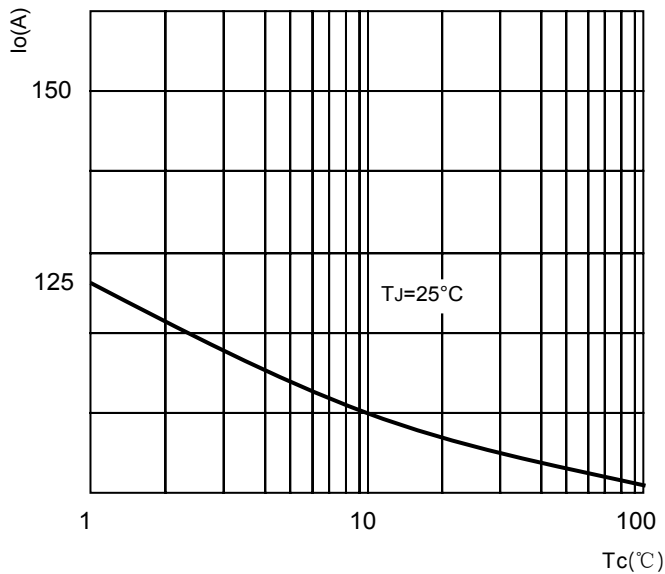


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

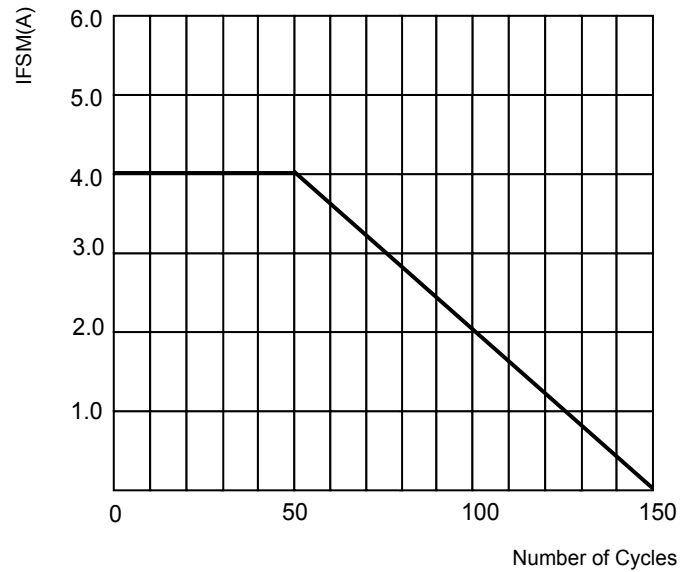


FIG.3-TYPICAL FORWARD CHARACTERISTICS



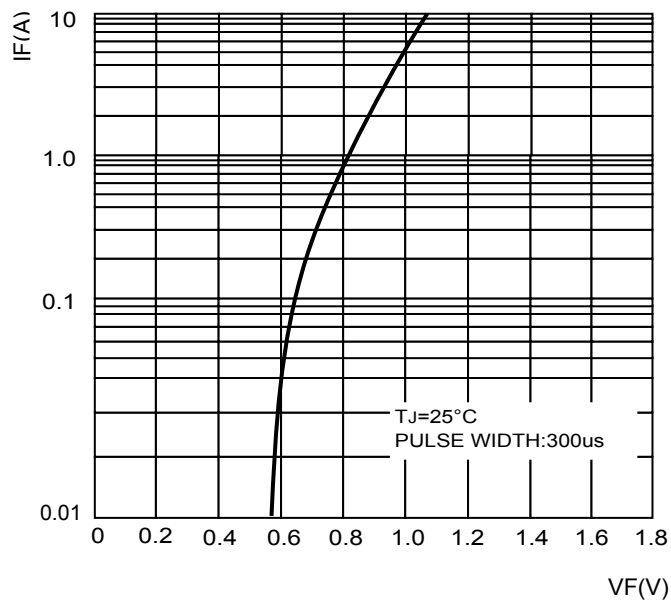


FIG.4-TYPICAL REVERSE CHARACTERISTICS

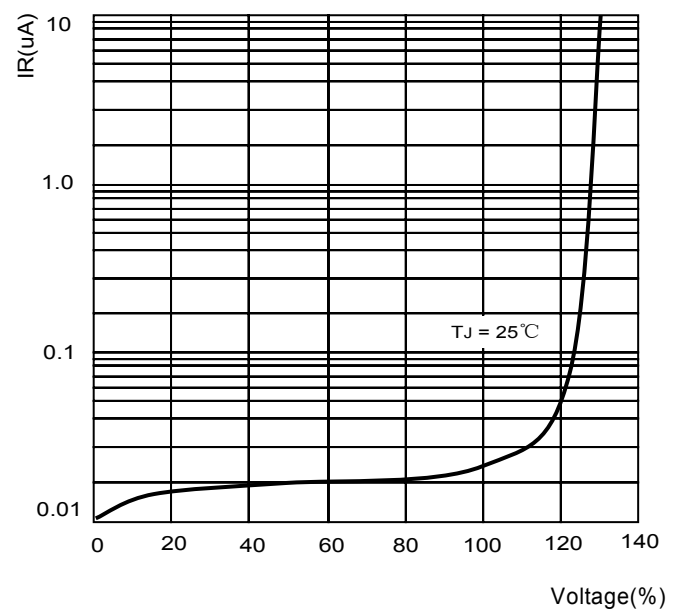

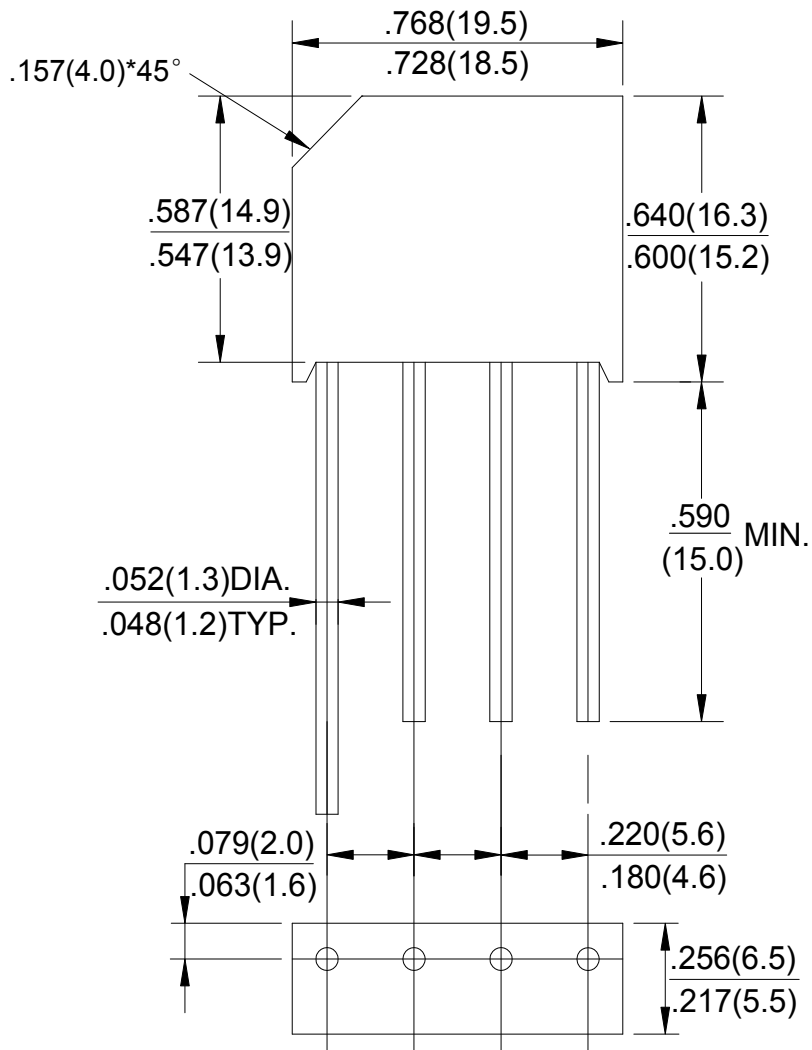

Dimensions in inches and (millimeters)